


CBB

Bending beam Loadcell

1, 2 tf

■ DIMENSIONS

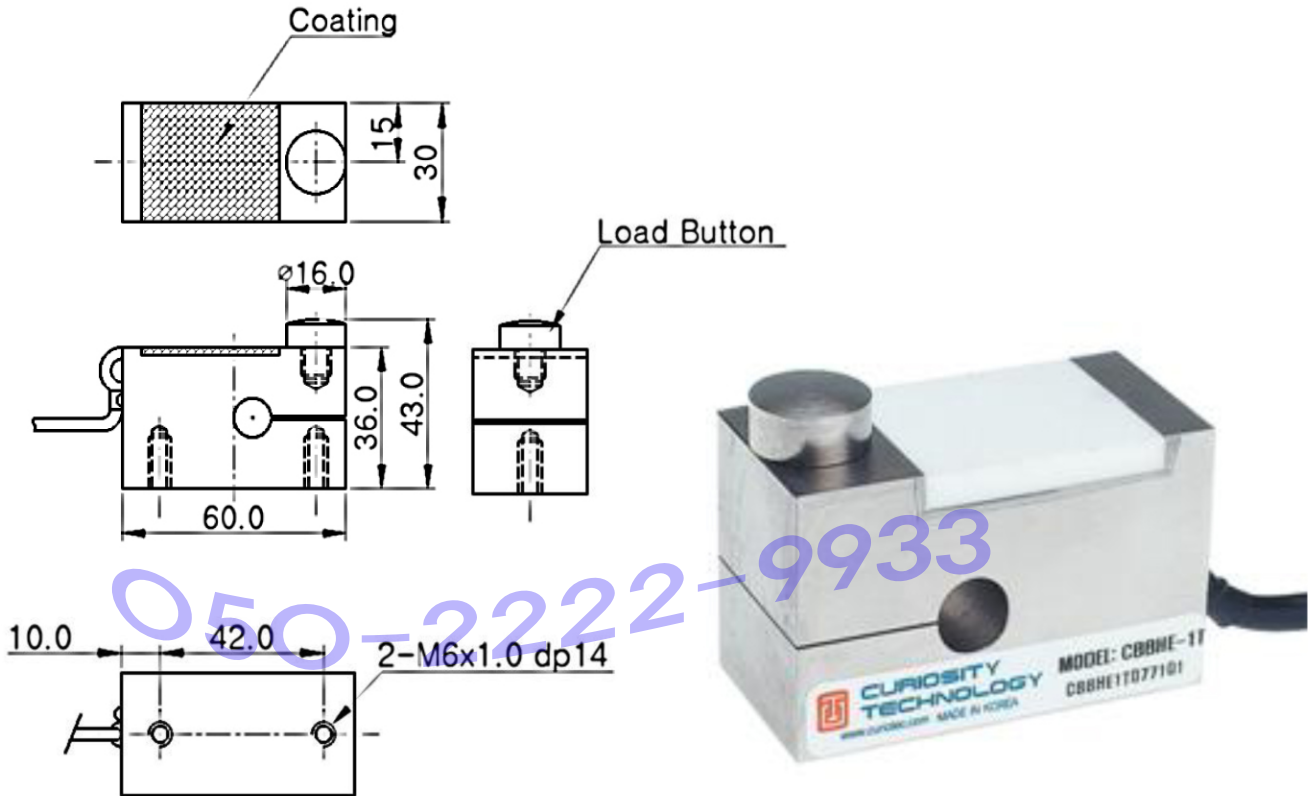

■ SPECIFICATIONS

Max. Capacity	tf	1, 2
Rated output	mV/V	1.5 ± 0.005
Zero balance	mV/V	0 ± 0.15
Accuracy class		
Combined error	%RO	2
Repeatability	%RO	0.3
Creep(30min.)	%RO	0.1
Temperature effect on		
Zero value	%RO/10°C	0.05
Output value	%RO/10°C	0.05
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	400 ± 50
Output	Ω	350 ± 3.5
Insulation	M Ω	> 2,000
Compensated temp. range	°C	-10 ~ +40
Operating temp. range	°C	-20 ~ +80

CURIOSITY TECHNOLOGY

www.casscience.com