

CDSB-BS


Truck & Tank weighing load cell **5, 10, 15 tf**

FEATURES

Robust design and easy installation
Strong against shock or side force



DIMENSIONS

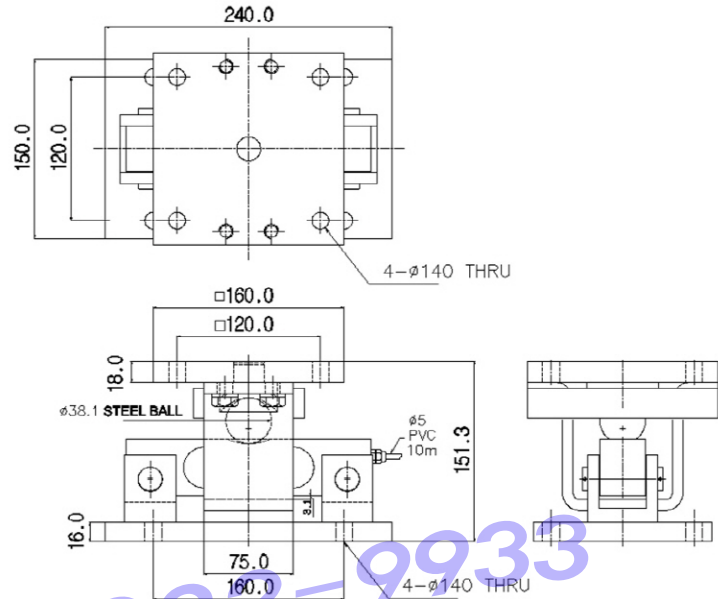


050-2222-9933

Material

Nickel plated steel

Cable

Braided shield 4-wire round cable with PVC-jacket



SPECIFICATIONS

Max. Capacity	tf	5, 10, 15
Rated output	mV/V	2.0 ± 0.004
Zero balance	mV/V	0.0 ± 0.02
Accuracy class		
Combined error	%	0.03
Repeatability	%	0.02
Creep(30min.)	%	0.03
Temperature effect on		
Zero value	%/°C	0.03
Output value	%/°C	0.015
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	800 ± 40
Output	Ω	700 ± 7
Insulation	MΩ	> 2,000
Compensated temp. range	°C	-10 ~ +40
Operating temp. range	°C	-20 ~ +80