CDSB-BS2

Truck & Tank weighing load cell *5, 10, 15 tf*

FEATURES

Robust design and easy installation
Strong against shock or side force

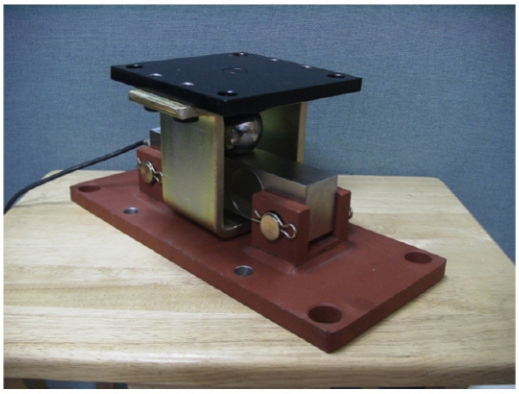

DIMENSIONS

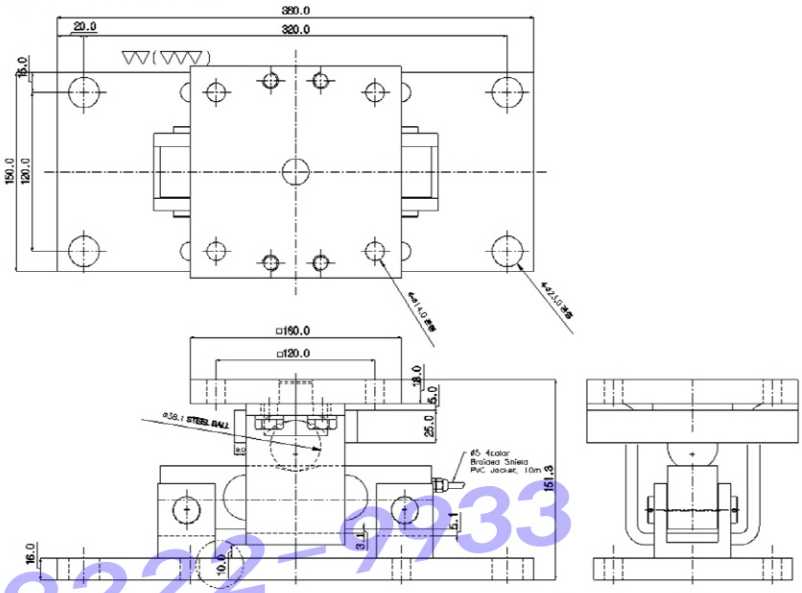



050-2222-9933

Material

Nickel plated steel

Cable

Braided shield 4-wire round cable with PVC-jacket

SPECIFICATIONS

Max. Capacity	tf	5, 10, 15
Rated output	mV/V	2.0 ± 0.004
Zero balance	mV/V	0.0 ± 0.02
Accuracy class		
Combined error	%	0.03
Repeatability	%	0.02
Creep(30min.)	%	0.03
Temperature effec on		
Zero value	%/℃	0.03
Output value	%/℃	0.015
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	800 ± 40
Output	Ω	700 ± 7
Insulation	MΩ	〉2,000
Compensated temp. range	℃	−10 ~ +40
Operating temp. range	℃	−20 ~ +80