

LC8117 Series

Tool Steel

호퍼스케일용

- 완전밀폐구조
- 실제 최대용량에 캘리브레이션 실행



050-2222-7933

SPECIFICATIONS


Model	LC8117 Series
정격출력	2.0±0.005mV/V
한계과부하	150%
종합오차	0.15%
크리프(30분)	0.03%
재현성	0.10%
제로바란스	0±0.03mV/V
온도보상범위	-10~+40℃
사용온도범위	-20~+80℃
권장인가전압	10V
최대인가전압	15V
입력단자간저항	350Ω ± 3.5Ω
출력단자간저항	350Ω ± 3.5Ω
절연저항	>2,000 MΩ
영점온도영향	0.03%/10℃
출력온도영향	0.03%/10℃
케이블길이	5m

Model	정격용량(질량)
LC8117-T020	20tf
LC8117-T030	30tf
LC8117-T050	50tf
LC8117-T100	100tf
LC8117-T200	200tf

Dimensions

CABLE	COLOR CODE
RED	EXC +
WHITE	EXC -
GREEN	SIG +
BLUE	SIG -
BLACK	SHIELD

UNIT=mm

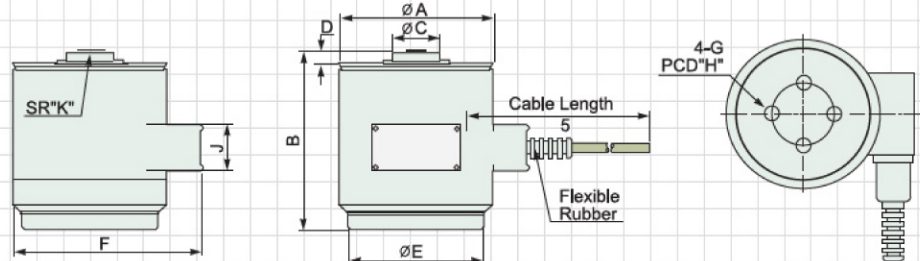

Mode	Capacity	Ø A	B	Ø C	D	E	F	G	H	J	K
LC8117 T020	20tf	118	145	36	10	104	150	M12×1.75	80	38	150
LC8117 T030	30tf	118	145	36	10	104	150	M12×1.75	80	38	150
LC8117 T050	50tf	118	160	50	20	104	170	M12×1.75	80	38	200
LC8117 T100	100tf	158	190	70	20	144	190	M16×2.0	100	38	200
LC8117 T200	200tf	214	230	95	30	188	249	M16×2.0	130	38	300