

SE 6125A / SE 6135A / SE 6145A / SE 6165A




CASSCIENCE.COM

제품 특징


- 벽·천장 고정형 외부표시기
- RS232C / RS485, 커런트 루프 모두 사용 가능
- 타사 인디케이터와 호환 가능
- 자동백업기능 삭제
- 통신 속도 자동 셋팅 (2,400 ~ 115,200 bps)
- 부저&스위치(옵션)

제품 외형도 [Unit:mm]

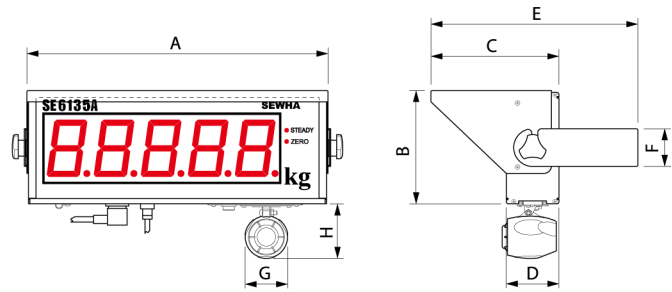

Unit (mm)	A	B	C	D	E	F	G	H
SE 6125A	330	131	150	70	255	50	57	73
SE 6135A	400	151	170	70	275	50		
SE 6145A	545	183	185	70	290	50		
SE 6165A	720	247	210	70	325	70		

	문자 높이	무게	전원 사양	작동 환경	사이즈 A x B x C (mm)
SE 6125A	58.4mm	2.5 kg	Free Voltage (AC 100V~240V, 50/60Hz)	- 10°C ~ + 40°C Under 85% RH	330 x 131 x 150
SE 6135A	76.2mm	4.5 kg			400 x 151 x 170
SE 6145A	101.6mm	7.0 kg			545 x 183 x 185
SE 6165A	152.4mm	9.0 kg			720 x 247 x 210

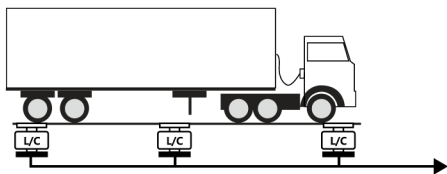


트럭스케일



인디케이터



SE6125A/SE6135A/SE6145A/SE6165A



우형기



인디케이터



SE6125A/SE6135A/SE6145A/SE6165A